Call Us Now
(888) 897-9005

www.enraysupply.com
12345 Pauls Valley Rd, Ste A-2
Austin, TX 78737



Vapor tight light


VLPG is a 4-foot vapor-tight LED fixture for garages, workshops, basements, and utility areas where dust or moisture protection matters. Selectable 20/30/40W output helps match light levels to the space, while three color temperatures tailor the visual tone. IP65 construction and 0-10V dimming support indoor or covered outdoor installations.

Key Advantages

- Select 20W, 30W, or 40W; 40W delivers up to 5,680 lumens.
- Choose 2700K, 4000K or 5000K to coordinate surrounding lighting.
- Use 0-10V dimming to adjust brightness after installation.
- IP65-rated housing suits dusty, moisture-prone indoor or covered outdoor areas.

Dimensions

40W

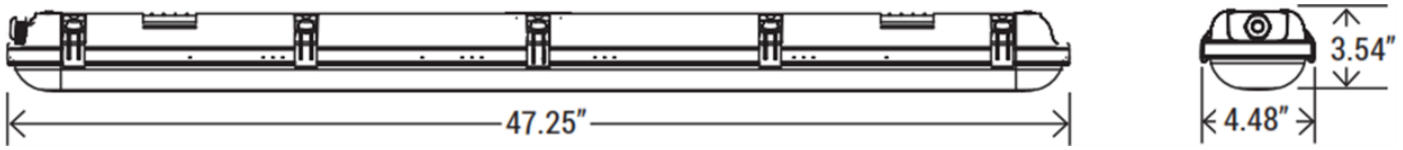

Accessories

Enhance the functionality of your lighting fixture with optional accessories designed for convenience and performance. These accessories complement the fixture's design and support a variety of lighting applications.

Battery Backup



Ensures uninterrupted lighting during power outages, providing added safety and reliability.

Motion Sensor Unit



Optimizes energy efficiency by activating the fixture only when motion is detected.

Dimming: 0-10V | Surge protection: 2KV | IP rating: IP65 | Housing: Aluminum | Lens: Polycarbonate

Part Number	Input Power	Input Voltage	Efficiency	Color Temp.	Light Distribution	CRI	Certificates	Warranty
VLPG040W-SCSW	40/30/20W	120-277V	142 lm/W	2700/4000/5000K	120°	80+	ETL	5 Years

Call Us Now
(888) 897-9005

www.enraysupply.com
12345 Pauls Valley Rd, Ste A-2
Austin, TX 78737





Light Source
Test Report
Vapor tight light

Part Number	Input Power
VLPG040W-SCSW	40W

VLPG040W-SCSW

Light Source Test Report

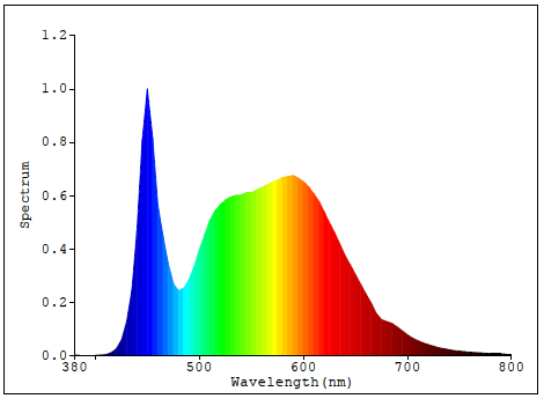

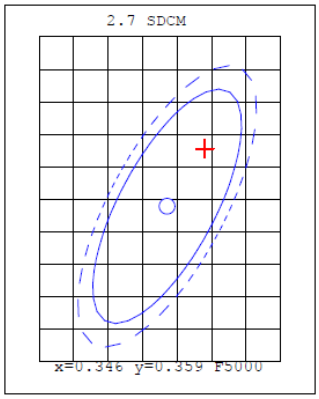

Original test labels and conditions are retained; a plot does not represent every selectable setting.